



## Features

- ✧ Energy saving more than 50%.
- ✧ LED light environmental protection and energy saving without UV radiation.
- ✧ High efficiency (90%) constant current driver, with heat protection system.
- ✧ With high light through PC cover.
- ✧ Special light mix design looked from the surface.
- ✧ Soft surface when lighting.
- ✧ No fluorescent flickering.
- ✧ No hazard of mercury or lead entering environment.
- ✧ *Two years warranty*


## Typical Applications

- ✧ Landscape Accent
- ✧ Architectural Lighting
- ✧ Display Case Accent
- ✧ Artwork Lighting
- ✧ Mood Lighting
- ✧ Home Indoor lighting



## 3 Feet (908mm) Tube Light

Part No.	Input Voltage	CCT	Luminous flux	Flux at 1m	Power Factor	Working temperature	Working moisture	CRI
EL-T8-08W2C-RB	AC100-240V	3000K±175	400-500lm	140 lux	>85	-20°C -50°C	10%-90%	>75%
EL-T8-08W2C-RE		4000K±400	450-550lm	145 lux	>85			
EL-T8-08W2C-RA		5700K±570	500-600lm	150 lux	>85			

## Mechanical Dimensions:

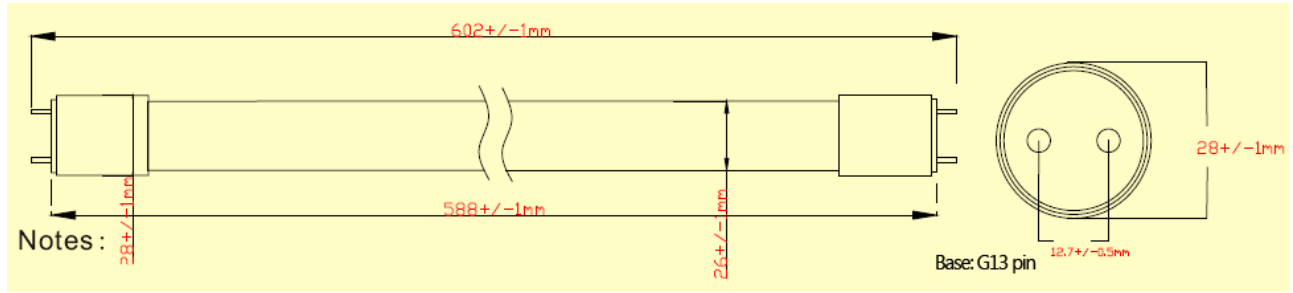

## Viewing Angle:

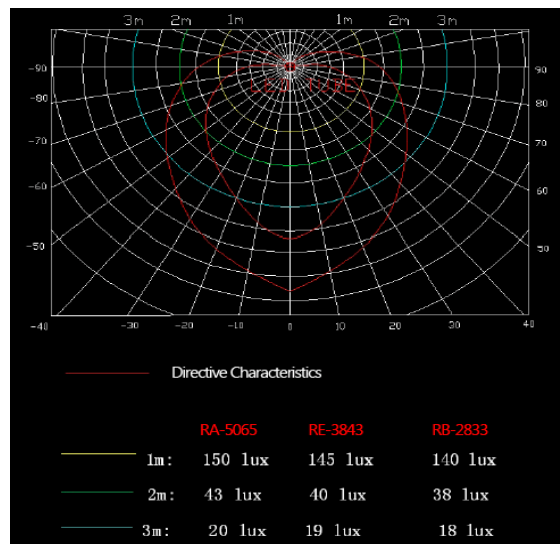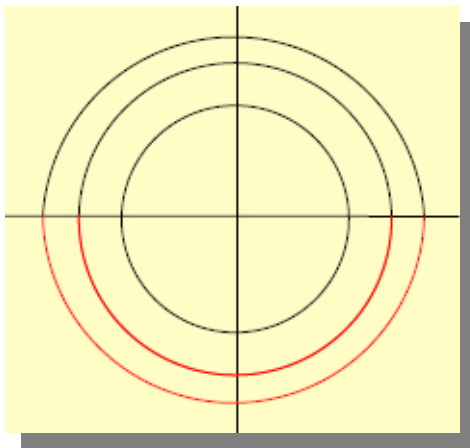



## Illuminance Maintenance:

Test Conditions:


TA=25°C

RH=65%

Light work lasting

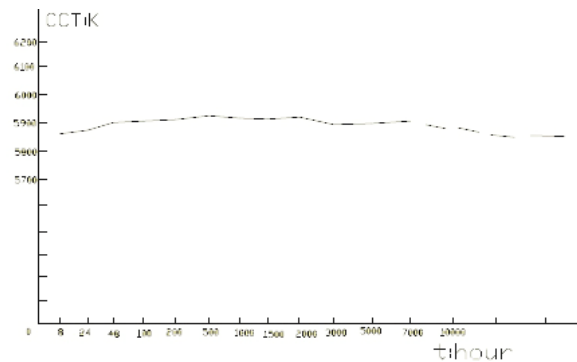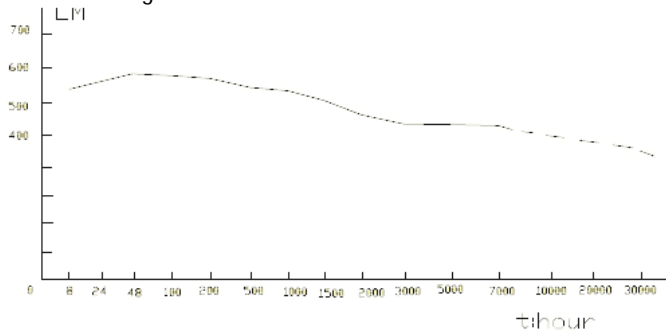

## The Relative Intensity vs. Wavelength:

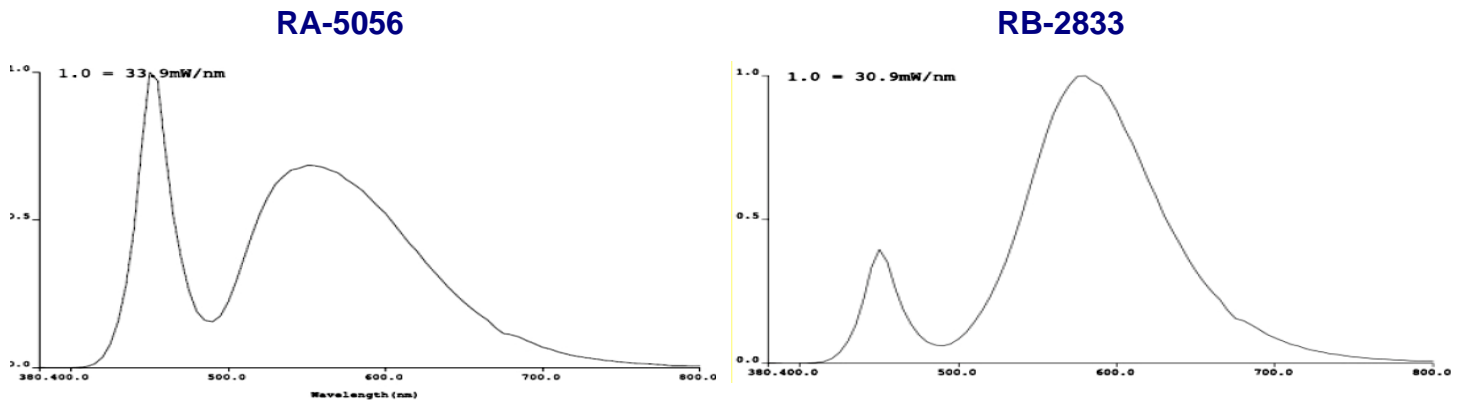

## Package Size:

- Carton Dimension: L625 x W175 x H145 mm
- Weight: 5 kg / box
- QTY.: 20 pcs / box

## Instructions and Attentions:

- Cut off the power supply before installation.
- No starter, ballast, or electronic switch is required.
- Please install lamp stand and T8 lamp holder first with the same length.
- Lamp working voltage is AC 220V.
- Please connect the two wire terminals located at the side of the lamp to the electricity L and N respectively.

